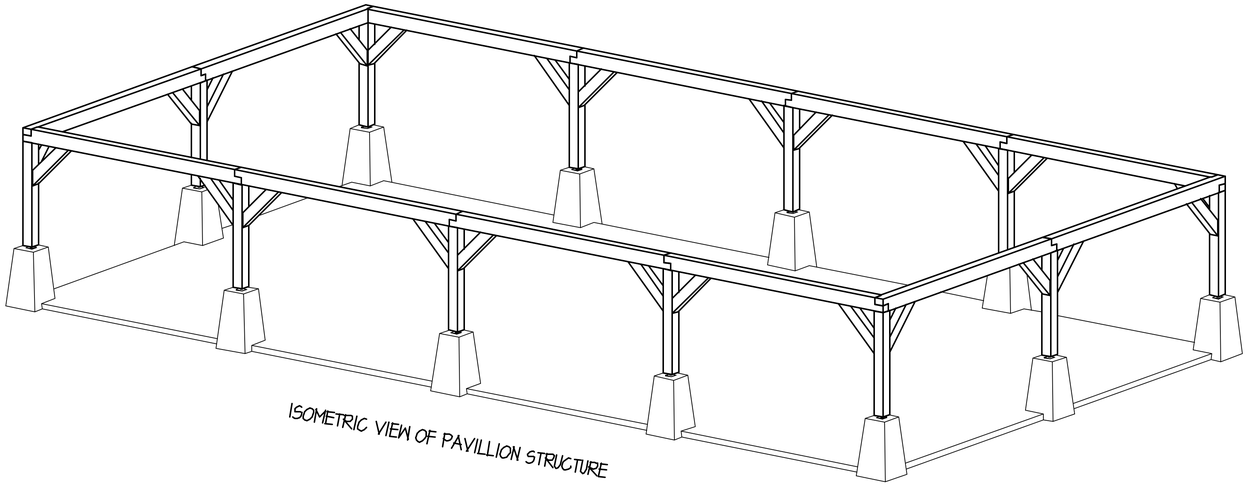

ISOMETRIC VIEW OF PAVILLION STRUCTURE

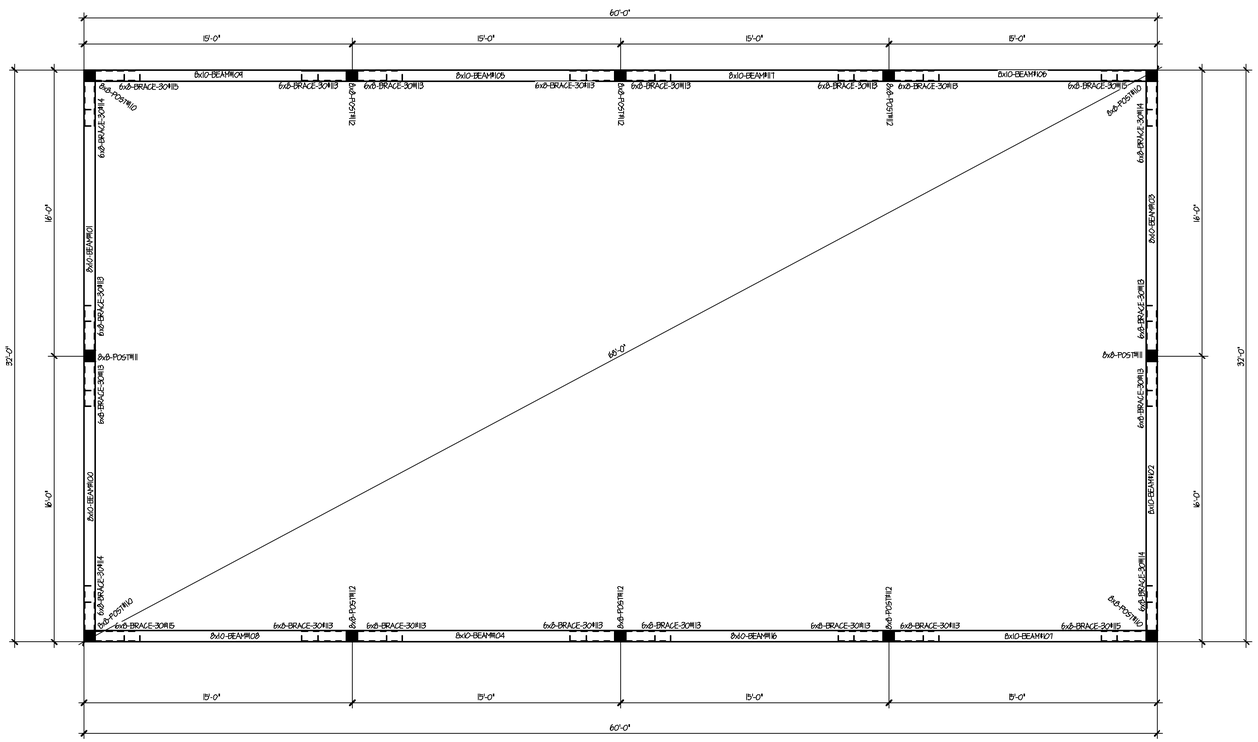

PLAN FRONT
FIRST FLOOR PLAN

ATTACHMENT NOTES

READ BEFORE ERECTING STRUCTURE.

PAVILLION ATTACHMENTS:

1. ATTACH POSTS TO PIERS WITH CUSTOM ADJUSTABLE POST JACKS
   ATTACH POST JACKS TO POSTS w/ (4 PER JACK) 1/4" x 1-1/2" LAG SCREWS.
2. ATTACH 8x10 BEAM LAPS TO POST w/ (4) 12" OLYMPIC FASTENERS.
3. ATTACH CORNER BRACES TO CORNER POSTS w/ (1) 5/8" x 8" LAG & WASHER.
4. ATTACH BRACES TO CENTER POSTS w/ (1) 5/8" x 18" THREADED THRU ROD & NUTS & WASHERS.
5. ATTACH BRACES TO 8x10 BEAMS w/ (1) 5/8" x 8" LAG & WASHER.
6. ATTACH ROOF TRUSSES w/(1) SIMPSON A23 ANGLE (2 PER TRUSS) & (8) 10d x 1-1/2" NAILS (PER ANGLE).
   ATTACH OUTRIGGERS TO DROP GABLE TRUSS WITH (1)-SIMPSON H3 HANGER. (1 PER OUTRIGGER) & (8) 10d x 1-1/2" NAILS (PER HANGER).

PRODUCTION NOTES:

1. EWP MATERIAL
2. PLANED & CHAMFERED

THE DESIGN REPRESENTED ON THIS PLAN IS INTENDED TO BE USED EXCLUSIVELY IN CONJUNCTION WITH THE CONSTRUCTION OF A STRUCTURE MANUFACTURED BY HEARTHSTONE, INC., AND, UNDER COPYRIGHT LAW, MAY NOT BE USED FOR ANY OTHER PURPOSE.

© 2004 HEARTHSTONE, INC.
ALL RIGHTS RESERVED RESPECTING DESIGN AND SUBJECT SHOWN ON THIS PLAN
TIMBERWRIGHT® & TIMBER TRACE™ ARE REGISTERED TRADEMARKS

HEARTHSTONE, INC.
1630 EAST HIGHWAY 25/70
DANDRIDGE, TENNESSEE 37725
800-247-4442

CUSTOMER: CITY OF DANDRIDGE
DANDRIDGE, TN

MODEL: CUSTOM TIMBERS FOR PAVILLION

SQUARE FOOTAGE: N/A

TITLE: PRODUCTION DRAWINGS

LAST DATE PLOTTED: 02-08-05		
REVISION TYPE:	REV. BY:	DATE:

SCALE: 1/4"=1'-0"

DATE: 3-30-04

DRAWN BY: RBA

CUSTOMER NAME: CITY OF DANDRIDGE

SALES ORDER NO: 110718

JOB ORDER NO: 19334

HEARTHSTONE REP: MANIS

SHEET NO: 1

G:\cadwr4\Plans for Sales\Orts-MCdy\Dandridge-1078-Mark\CityofDandridge-Up.3d